




ANOTHER SBC INNOVATION FROM THE CEDAR SHINGLE EXPERTS

One of the key components to cedar shingle performance is proper nail placement. For this purpose, SBC has come up with the Easy Nailing System to quickly guide the installer for perfect nail alignment, regardless of exposure.

SBC « EASY NAILING SYSTEM » ADVANTAGES

- Simple, reliable guide
- Quick and easy installation
- Proper nail alignment
- No need to mark off a reference point as to ensure nail placement

Making nailing easier will ensure proper installation and better shingle performance.

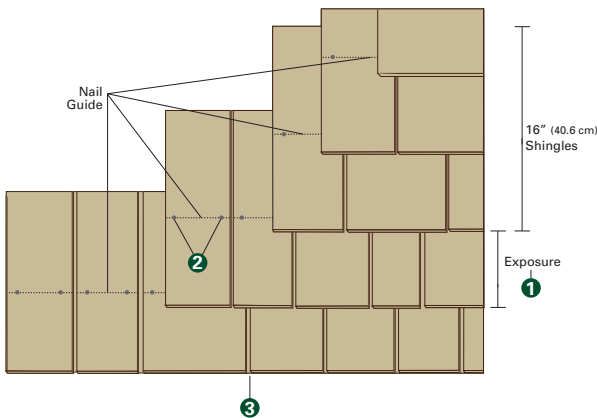

INSTALLATION TIPS

- 1 Recommended exposure: 5" (12,7 cm)
- 2 Use 2 nails per shingle at 3/4" (1,9 cm) from each edge, at 1" (2,5cm) above the butt line of overlapping shingle. For shingle wider than 8" (20,3 cm), use 2 additional nails driven 1" (2,5 cm) apart near the center of the shingle
- 3 Spacing between shingles should be 1/8" to 1/4" (0,3 to 0,6 cm) to allow for expansion of kiln-dried and pre-stained shingles

All SBC Extra (A) and Clear (B) R&R shingles, whether natural and factory-stained, are marked at 6-1/4" (15,8 cm) from the butt line.

Common Exposures	Nail placement
4" (10.2 cm)	1" (2,5 cm) below line
5" (12.7 cm) standard	Right on line
6" (15.2 cm)	1" (2,5 cm) above line

SBC R&R SHINGLE ADVANTAGES



- Graded on both faces
- Minimum width 3-7/16" (8,7cm)
- R&R precision 1/64" to 10" (4 mm to 25,4 cm)
- Easy nail guide
- Kiln-dried by dehumidification
- Superior, uniform, stain mil tickness
- Best long-term warranty of the industry 10/25-30 years



Where Quality comes naturally!



SBC

Cedar Shingle Manufacturer

www.sbcedar.com
info@sbcedar.com

754, 8^e Rue, Saint-Prospier
Canada (Québec) G0M 1Y0

Telephone: (418) 594-6201
Fax: (418) 594-8334